

# CCT Selectable Slim Recessed Swivel Downlight

2700K / 3000K / 3500K / 4000K / 5000K

## DESCRIPTION

The MW Lighting Swivel LED Downlights are complete 4 & 6 canless recessed downlights with adjustable Swivel. These recessed downlight designed for use in new construction , remodel and retrofit installation,without needing a housing or j-box . Choose your color temperature directly on the fixture. With the flick of a switch , you can choose between 5 color temperature ranging from warm ( 2700K ) to daylight ( 5000K ) prior to installing into your ceiling .

The MW Lighting Swivel LED recessed lighting fixture features an LED driver with smooth dimming capability , it's adjustable Swivel offers 85 ° tilt and up to 355°rotation , 40° beam angel. The Swivel LED lights are great for accent or task lighting as well as wall washing and are wet location listing , can be in direct contact with insulation.



## SPECIFICATION FEATURES

### 5 CCT

- Select color temperature from 2700K warm white, 3000K soft white, 3500K natural white, 4000K cool white, or 5000K daylight for your environment.
- The CCT switch is located on the fixture, easy to organize.

### CONSTRUCTION

- Unit includes die-cast metal housing, LED array, heat sink, lens.

### CONSTRUCTION

- High quality PC lens.
- Efficiency LED array.
- Diffuse for uniform illumination.

### DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10% .

### MOUNTING

- Pre-installed spring clips.

### COMPLIANCE/CERTIFICATION

- ENERGY STAR® listed.
- ETL certified.
- T24 certified.
- EMI/RFI emissions per FCC 47CFR Part 15B.

### WARRANTY

5 years manufacturer warranty, consult [www.mwledlighting.com](http://www.mwledlighting.com) for more details.

\* Terms and conditions may apply.




# ORDERING INFORMATION


Series	CRI	Power	CCT	Lumens	Efficacy	Dimmable
MFGD049-FL-5CCT-WH	90	9W	2700-3000-3500-4000-5000K	540LM	60LM/W	Y
MFGD612-FL-5CCT-WH	90	12W	2700-3000-3500-4000-5000K	900LM	75LM/W	Y

## DIMENSION

Type	Length (Inch)	Width (Inch)	Height (Inch)	Weight (LB)
4inch	5.04	5.04	1.50	1.08
6inch	7.20	7.20	2.00	1.61

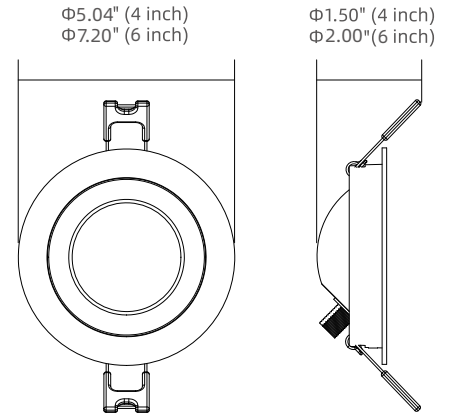

## PHOTOMETRY

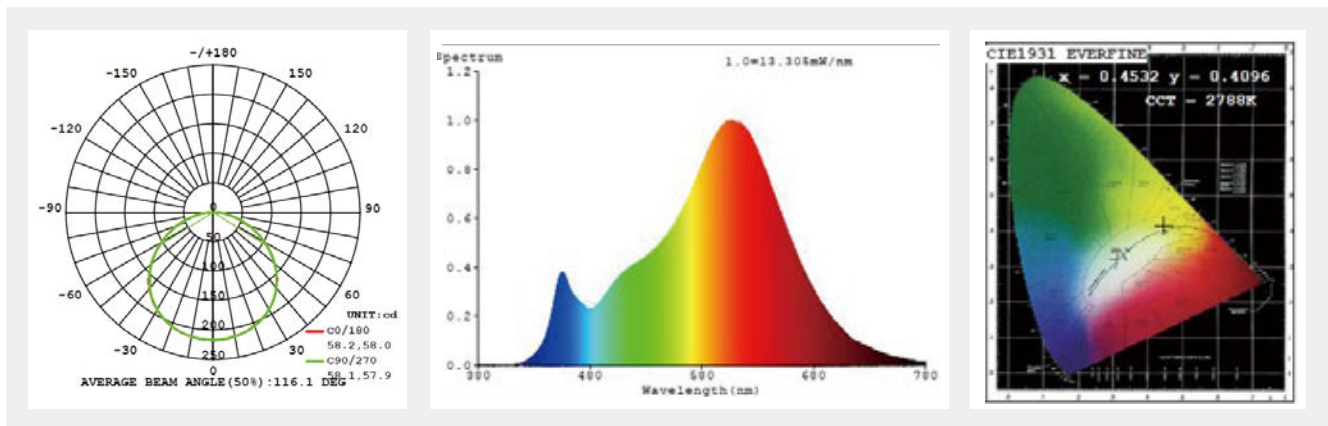

## INSTALLATION METHOD

With steel spring clip and no housing required, ideal for shallow ceiling plenum, it is easy to install.

